CHENGSHAN

2025

Headquarter Office

PRINX CHENGSHAN (SHANDONG) TIRE COMPANY LTD.

98 Nanshan(N) Road, Rongcheng, China, 264300

+86-631-7517777 | info@prinxchengshan.com | www.prinxchengshan.com

https://www.instagram.com/prinxchengshan | https://www.facebook.com/prinxchengshan

https://twitter.com/PrinxChengshan | https://www.linkedin.com/company/32321333/admin/page-posts/published


PRINX https://en.prinx.cn | CHENGSHAN https://www.chengshantire.com

AUSTONE TIRES http://www.austonetire.com | FORTUNE TIRES https://www.fortunetire.com

CHENGSHAN

PRODUCT CATALOGUE

STRONG TIRE FOR LONGER PERFORMANCE

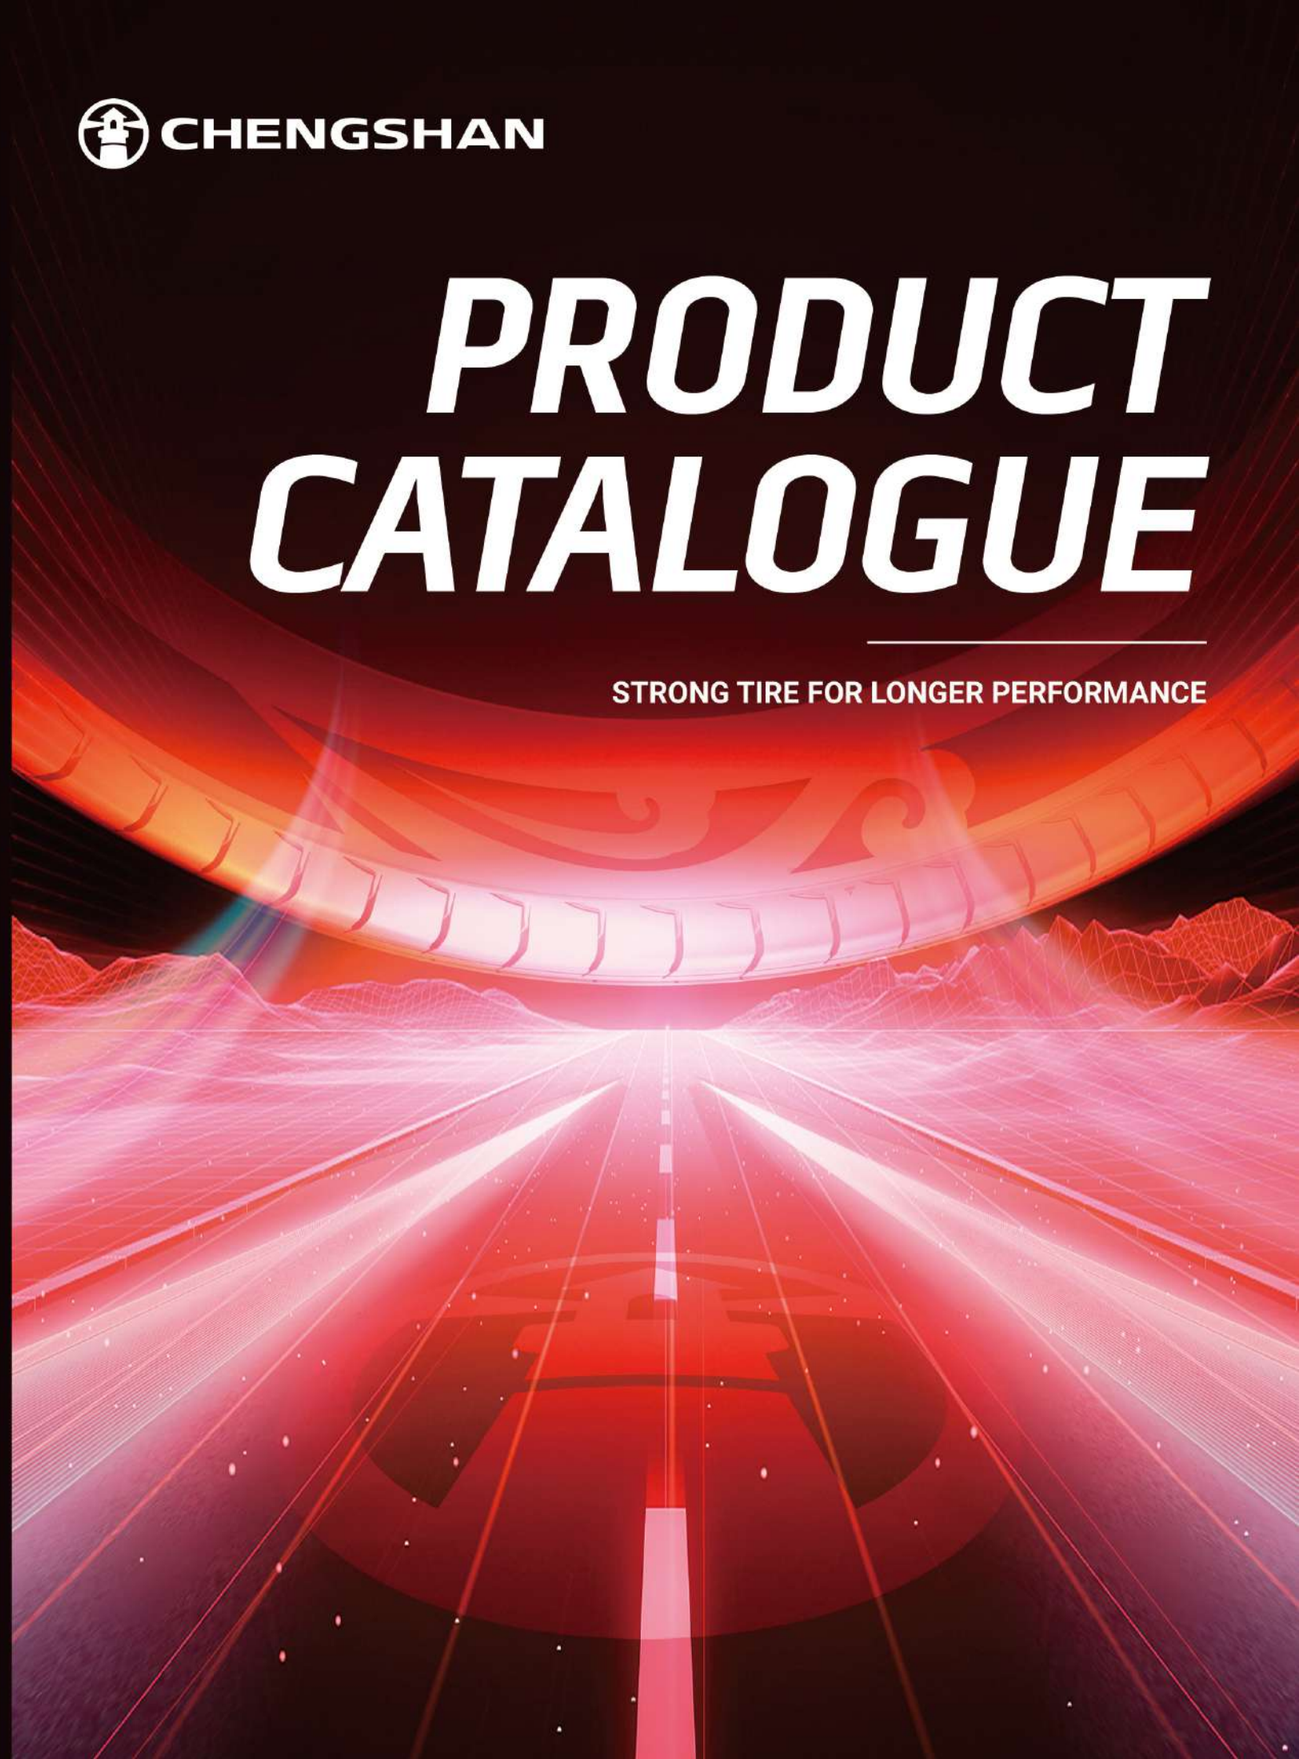

PRODUCT CATALOGUE

PASSENGER SUMMER



PASSENGER/SUV WINTER/ALL SEASON



SUV/4X4



VAN



CHENGSHAN

STRONG TIRE FOR LONGER PERFORMANCE

PASSENGER CAR SUMMER



XTRIP
NEW PRODUCT

HP

XTRIP PLUS
NEW PRODUCT

UHP

SPORTCAT CSC-801

TOURING

SPORTCAT CSC-802

HP

SPORTCAT CSC-701

UHP



Good Wet Grip

Long Mileage

NEW PRODUCT

XTRIP

PASSENGER ULTRA HIGH PERFORMANCE FOR MEDIUM/ HIGH GRADE CAR AND SPORTS CAR





TECHNICAL SPECIFICATIONS

19 ARTICLES
RIM SIZE: 15”- 18”
SECTION WIDTH: 185 - 225
ASPECT RATIO: 50 - 65
SPEED RATING: H - V

ROLLING RESISTANCE: C
WET GRIP: B
NOISE LEVEL: 70dB
Velvet Sidewall:
laser-carved mold

PRODUCT CHARACTERISTICS

- Nano level optimized tread compound coupled with optimal tread pattern make the tire run longer.
- The sidewall with two layers of high tensile cord enables it to absorb pinch shock thus decrease the occurrence of road hazard.
- UTQG tread wear index: 560



RIM	Size	Load	Speed	Load Type	Highlight
15	185/60R15	88	H	XL	-
	185/65R15	92	H	XL	-
	195/55R15	89	V	XL	-
	195/60R15	88	H	-	-
	195/65R15	95	H	XL	-
16	195/60R16	93	H	XL	-
	205/55R16	94	V	XL	-
	205/60R16	96	V	XL	-
	205/65R16	99	V	XL	-
	215/60R16	99	H	XL	-
17	205/50R17	93	H	XL	-
	215/50R17	95	V	XL	-
	215/55R17	98	V	XL	-
	215/60R17	96	V	-	Four Grooves
	225/50R17	98	V	XL	Four Grooves
	225/55R17	101	V	XL	-
	225/60R17	103	V	XL	Four Grooves
	225/65R17	102	V	-	Four Grooves
18	225/60R18	104	V	XL	Four Grooves



Silence


Good Handling

NEW PRODUCT

XTRIP PLUS

PASSENGER ULTRA HIGH PERFORMANCE FOR MEDIUM/ HIGH GRADE CAR AND SPORTS CAR



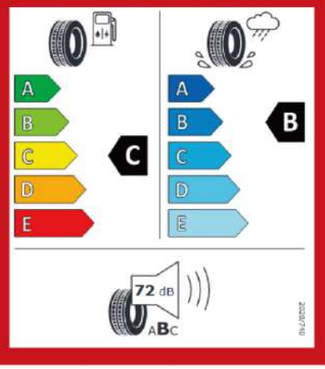


TECHNICAL SPECIFICATIONS

56 ARTICLES
RIM SIZE: 16" - 22"
SECTION WIDTH: 215 -295
ASPECT RATIO: 35 - 55
SPEED RATING: V - Y

ROLLING RESISTANCE: C
WET GRIP: B
NOISE LEVEL: 71dB - 72dB
Velvet Sidewall: laser-carved mold

PRODUCT CHARACTERISTICS

- Thanks to microscopic self-adaption technology, XTRIP PLUS enables to attach to the ground closely, and thus delivers better grip and handling performance even at high speed.
- By adopting premium Infinite-BLK technology, cracks on sidewall will be decreased significantly and original sidewall appearance can be retained for longer time .

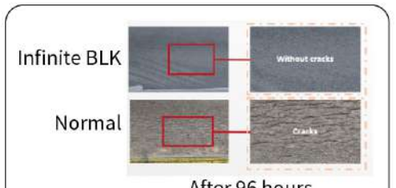

After 96 hours
Equal to the end of lifespan

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level	Highlight
16	215/55R16	97	V	XL	C	B	72	2 {))}	-
	225/55R16	99	W	XL	C	B	72	2 {))}	-
17	215/45R17	91	W	XL	C	B	72	2 {))}	-
	225/45R17	94	W	XL	C	B	72	2 {))}	-
	235/45R17	97	W	XL	C	B	72	2 {))}	-
	235/50R17	96	W	-	C	B	71	2 {))}	-
	245/45R17	99	W	XL	C	B	72	2 {))}	-
	*255/45R17	98	W	-	-	-	-	-	Silenteck
18	*215/50R18	92	W	-				-	-
	*225/40R18	92	Y	XL				-	-
	225/45R18	95	W	XL	C	B	72	2 {))}	-
	225/50R18	95	W	-				-	-
	235/45R18	98	W	XL	C	B	72	2 {))}	Silenteck
	235/50R18	101	W	XL	C	B	72	2 {))}	-
	245/40R18	97	Y	XL	C	B	72	2 {))}	-
	245/45R18	100	W	XL	C	B	72	2 {))}	Silenteck
	245/50R18	104	W	XL	C	B	72	2 {))}	-
	255/40R18	99	Y	XL	C	B	72	2 {))}	-
19	225/45R19	96	W	XL	C	B	72	2 {))}	-
	235/40R19	96	Y	XL				-	-
	235/45R19	99	W	XL				-	-
	235/50R19	103	W	XL				-	-
	245/40R19	98	W	XL	C	B	72	2 {))}	Healteck
	245/45R19	102	Y	XL	C	B	72	2 {))}	Silenteck
	245/50R19	105	W	XL				-	-
	*255/40R19	100	Y	XL	-	-	-	-	Silenteck
	255/45R19	104	W	XL				-	-
	*255/50R19	107	V	XL	-	-	-	-	Silenteck

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level	Highlight
19	*255/55R19	111	V	XL	-	-	-	-	Silenteck
	275/35R19	96	W	-				-	-
	*275/40R19	105	Y	XL	-	-	-	-	Silenteck
	*275/55R19	111	W	-	-	-	-	-	Silenteck
20	*235/45R20	96	W	-	-	-	-	-	Silenteck
	*235/50R20	104	W	XL	-	-	-	-	Silenteck
	235/55R20	102	W	-				-	-
	*245/40R20	99	Y	XL	-	-	-	-	Silenteck
	245/45R20	103	Y	XL				-	-
	245/50R20	105	W	XL				-	-
	255/40R20	101	W	XL				-	-
	255/45R20	105	Y	XL				-	-
	255/50R20	109	W	XL				-	-
	*265/40R20	104	Y	XL	-	-	-	-	Silenteck
	*265/45R20	108	Y	XL	-	-	-	-	Silenteck
	*275/35R20	102	Y	XL	-	-	-	-	Silenteck
	275/40R20	106	V	XL				-	-
	*275/45R20	110	Y	XL	-	-	-	-	Silenteck
	*275/50R20	113	W	XL	-	-	-	-	Silenteck
21	*255/40R21	102	Y	XL	-	-	-	-	Silenteck
	*255/45R21	106	W	XL	-	-	-	-	Silenteck
	*265/40R21	105	Y	XL	-	-	-	-	Silenteck
	265/45R21	108	Y	XL				-	-
	*285/45R21	113	W	XL	-	-	-	-	Silenteck
	*295/40R21	111	Y	XL	-	-	-	-	Silenteck
22	*265/40R22	106	Y	-	-	-	-	-	Silenteck
	*275/50R22	111	W	-	-	-	-	-	Silenteck
	*285/40R22	110	Y	XL	-	-	-	-	Silenteck

Notes: *under development




Comfort

Fuel Economy

SPORTCAT CSC-801

PASSENGER STANDARD PERFORMANCE FOR SMALL /COMPACT AND FAMILY CAR TIRES



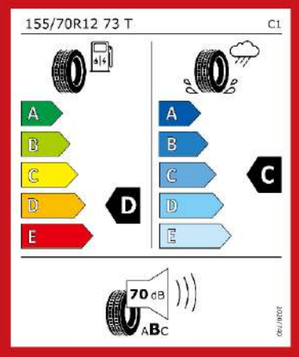

TECHNICAL SPECIFICATIONS

23 ARTICLES
RIM SIZE: 12" - 16"
SECTION WIDTH: 155 - 205
ASPECT RATIO: 55 - 80

SPEED RATING: T - V
ROLLING RESISTANCE: D
WET GRIP: C
NOISE LEVEL: 70dB - 71dB

PRODUCT CHARACTERISTICS

- Specially developed fuel-saving tyre for smaller city-cars and compact vehicles with optimised pattern design.
- Balance of mileage and fuel efficiency, perfect economy and eco-friendly.
- Wear-resistant tread compound and optimised tread groove design provide longer mileage.



- Newly designed tread compound reduces energy loss and heat generation.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
12	155/70R12	73	T	-	D	C	70	2 {))}
	165/70R12	77	T	-	D	C	70	2 {))}
13	155/65R13	73	T	-	D	C	70	2 {))}
	155/70R13	75	T	-	D	C	70	2 {))}
	155/80R13	79	T	-	D	C	70	2 {))}
	165/65R13	77	T	-	D	C	70	2 {))}
	165/70R13	79	T	-	D	C	70	2 {))}
	165/70R13	83	T	XL	D	C	71	2 {))}
	165/80R13	83	T	-	D	C	70	2 {))}
	175/60R13	77	T	-	D	C	70	2 {))}
	175/70R13	82	T	-	D	C	70	2 {))}
	185/70R13	86	T	-	D	C	70	2 {))}
14	155/65R14	75	T	-	D	C	70	2 {))}
	155/70R14	77	T	-	D	C	70	2 {))}
	165/65R14	79	T	-	D	C	70	2 {))}
	165/70R14	81	T	-	D	C	70	2 {))}
	185/70R14	88	H	-	D	C	70	2 {))}
	195/60R14	86	H	-	D	C	70	2 {))}
	195/70R14	91	H	-	D	C	70	2 {))}
15	195/65R15	95	H	XL	D	C	70	2 {))}
	205/60R15	91	H	-	D	C	70	2 {))}
	205/70R15	96	H	-	D	C	70	2 {))}
16	205/55R16	94	V	XL	D	C	71	2 {))}




SPORTCAT CSC-802

PASSENGER HIGH PERFORMANCE
FOR MEDIUM/ HIGH GRADE CAR




TECHNICAL SPECIFICATIONS

36 ARTICLES
RIM SIZE: 14" - 17"
SECTION WIDTH: 165 - 225
ASPECT RATIO: 50 - 70
SPEED RATING: H - V
ROLLING RESISTANCE: C/D
WET GRIP: B/C
NOISE LEVEL: 69dB - 72dB




PRODUCT CHARACTERISTICS

- Widened shoulder pattern design improves overall rigidity, ensures a comfortable ride and gives consideration to the ability of the sport driving.
- Tread compound with high toughness makes tyre better contact with the road surface and mitigate shocks from the road.



- Optimized pattern design provides better protection on wet roads.



- Revolutionized tread compound with nanoscale silica gives the tire low rolling resistance, thus low heat generation.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
14	165/60R14	75	H	-	D	B	69	2 {))}
	175/65R14	82	H	-	D	B	69	2 {))}
	175/70R14	84	H	-	D	B	70	2 {))}
	185/60R14	82	H	-	D	C	70	2 {))}
	185/65R14	86	H	-	D	C	70	2 {))}
	205/60R14	88	H	-	C	B	70	2 {))}
15	175/65R15	84	V	-	D	B	69	2 {))}
	185/55R15	82	V	-	D	B	69	2 {))}
	185/60R15	84	H	-	D	C	70	2 {))}
	185/60R15	88	H	XL	D	B	69	2 {))}
	185/65R15	88	H	-	D	C	70	2 {))}
	195/50R15	82	V	-	D	B	70	2 {))}
	195/55R15	85	V	-	D	C	71	2 {))}
	195/60R15	88	H	-	D	B	70	2 {))}
	195/60R15	88	H	-	D	C	70	2 {))}
	195/65R15	91	H	-	D	C	70	2 {))}
	205/65R15	94	H	-	C	B	70	2 {))}
16	175/60R16	82	H	-	D	B	70	2 {))}
	195/50R16	88	V	XL	D	B	70	2 {))}
	195/55R16	87	V	-	D	B	70	2 {))}
	195/60R16	89	H	-	D	B	70	2 {))}
	205/50R16	91	V	XL	C	B	72	2 {))}
	205/55R16	91	V	-	C	B	69	2 {))}
	205/55R16	91	V	-	D	C	71	2 {))}
	205/60R16	92	V	-	C	B	70	2 {))}
	205/60R16	96	V	XL	C	B	71	2 {))}
	205/65R16	95	V	-	C	B	70	2 {))}
	215/55R16	93	V	-	C	B	70	2 {))}
	215/60R16	95	V	-	C	B	70	2 {))}
	225/55R16	95	V	-	C	B	70	2 {))}
	225/60R16	98	V	-	C	B	70	2 {))}
17	205/50R17	93	V	XL	C	B	70	2 {))}
	215/50R17	91	V	-	C	B	70	2 {))}
	215/55R17	94	V	-	C	B	70	2 {))}
	225/50R17	94	V	-	C	B	71	2 {))}
	225/55R17	101	V	XL	C	B	70	2 {))}



SPORTCAT CSC-701


PASSENGER ULTRA HIGH PERFORMANCE FOR MEDIUM/ HIGH GRADE CAR AND SPORTS CAR



TECHNICAL SPECIFICATIONS

54 ARTICLES
RIM SIZE: 16" - 22"
SECTION WIDTH: 195 - 295
ASPECT RATIO: 30 - 55

SPEED RATING: V - Y
ROLLING RESISTANCE: C
WET GRIP: C
NOISE LEVEL: 70dB - 73dB



PRODUCT CHARACTERISTICS

- CSC-701 is engineered to deliver precise wet and dry handling performance.
- With an asymmetrical tread design and enhanced tread formula, CSC-701 provides exceptional handling performance both in the corner and on the highway.
- Advanced tread compound delivers superior cornering and exceptional handling.
- The pattern structure design provides driving safety.
- Effective noise control provides quality ride experience everyday.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
16	215/55R16	97	V	XL	C	C	72	2 {))}
17	205/45ZR17	88	W	XL	C	C	72	2 {))}
	205/50ZR17	93	W	XL	C	C	72	2 {))}
	205/55R17	95	V	XL	C	C	72	2 {))}
	215/45ZR17	91	Y	XL	C	C	72	2 {))}
	215/50ZR17	95	W	XL	C	C	72	2 {))}
	215/55ZR17	98	Y	XL	C	C	72	2 {))}
	225/45ZR17	94	Y	XL	C	C	72	2 {))}
	225/50ZR17	98	Y	XL	C	C	72	2 {))}
	225/55ZR17	101	W	XL	C	C	72	2 {))}
	235/45ZR17	97	W	XL	C	C	72	2 {))}
	245/40ZR17	91	W	-	C	C	71	2 {))}
	245/45ZR17	99	W	XL	C	C	72	2 {))}
18	215/45ZR18	93	W	XL	C	C	71	2 {))}
	225/40ZR18	92	Y	XL	C	C	72	2 {))}
	225/45ZR18	91	W	-	C	C	71	2 {))}
	235/40ZR18	95	W	XL	C	C	70	2 {))}
	235/45ZR18	98	W	XL	C	C	72	2 {))}
	245/40ZR18	97	W	XL	C	C	72	2 {))}
	245/45ZR18	100	W	XL	C	C	72	2 {))}
	245/50ZR18	100	W	-	-	-	-	-
	255/35ZR18	94	Y	XL	C	C	73	2 {))}
	255/40ZR18	99	W	XL	C	C	73	2 {))}
	255/45ZR18	103	W	XL	C	C	73	2 {))}
	265/35ZR18	97	W	XL	C	C	73	2 {))}
	275/35ZR18	99	W	XL	C	C	73	2 {))}
19	225/35ZR19	88	Y	XL	C	C	72	2 {))}
	225/40ZR19	93	Y	XL	C	C	72	2 {))}
	225/45ZR19	96	Y	XL	C	C	72	2 {))}
	235/35ZR19	91	W	XL	C	C	72	2 {))}
	235/40ZR19	96	Y	XL	C	C	72	2 {))}
	245/35ZR19	93	W	XL	C	C	72	2 {))}
	245/40ZR19	98	W	XL	C	C	72	2 {))}
	255/30ZR19	91	Y	XL	C	C	73	2 {))}
	255/35ZR19	96	Y	XL	C	C	73	2 {))}
	255/40ZR19	100	Y	XL	C	C	73	2 {))}
	255/45ZR19	104	W	XL	C	C	73	2 {))}
	275/35ZR19	100	Y	XL	C	C	73	2 {))}
20	195/55R20	95	V	XL	C	C	72	2 {))}
	235/30ZR20	88	Y	XL	C	C	72	2 {))}
	245/35ZR20	95	Y	XL	C	C	72	2 {))}
	245/40ZR20	99	Y	XL	C	C	72	2 {))}
	255/35ZR20	97	Y	XL	C	C	73	2 {))}
	275/30ZR20	97	W	XL	C	C	73	2 {))}
	275/35ZR20	102	Y	XL	C	C	73	2 {))}
	275/45R20	110	V	XL	C	C	73	2 {))}
21	295/35ZR21	107	Y	XL	C	C	70	1 {)}
22	265/35ZR22	102	Y	XL	C	C	73	2 {))}

PASSENGER CAR/SUV WINTER

BORIALIS ICE



STUDDED

BORIALIS SNOW



FRICTION

BORREAS WINTER PRO



HP WINTER

MONTICE CSC-901



HP WINTER



NEW PRODUCT

BORIALIS ICE

PASSENGER & SUV HIGH PERFORMANCE WINTER

Good Handling


Good Ice and Snow Grip



TECHNICAL SPECIFICATIONS

51 ARTICLES
RIM SIZE: 15" - 22"
SECTION WIDTH: 185 - 275
ASPECT RATIO: 45 - 65
SPEED RATING: T

PRODUCT CHARACTERISTICS



- With tie-bar in between, elevates rigidity and suppress tread deformation when cornering, braking and accelerating. Thus, driving stability can be ensured.
- Facilitates to channel water away from the surface efficiently which reduces the risk of aquaplaning.

Snow/Ice grip testing
※ Site: Finland
※ Institute: TÜV Rheinland
※ Size: 205/55R16
※ Result: ECE/ R164 certified



- 100 stud pins available per meter along the rolling circumference.
- Low rate of stud pin loss - 4 in 10000 after accredited road test.
- ECE and R164 certified for stud tire approval as key indictor of strong grip on ice and snow.
- Meet Phase A+ standard with overrun test method formulated by Finnish Ministry of Transport as a compelling proof of low impact on road damage.

RIM	Size	Load	Speed	Load Type
15	185/60R15	88	T	XL
	*185/65R15	92	T	XL
	*195/65R15	95	T	XL
16	*195/55R16	91	T	XL
	205/55R16	94	T	XL
	205/60R16	96	T	XL
	*215/65R16	102	T	XL
17	*205/50R17	93	T	XL
	*215/50R17	95	T	XL
	*215/55R17	98	T	XL
	*215/60R17	100	T	XL
	*225/45R17	94	T	XL
	*225/50R17	98	T	XL
	*225/55R17	101	T	XL
	*225/60R17	103	T	XL
	*225/65R17	106	T	XL
	*235/55R17	103	T	XL
	235/65R17	108	T	XL
	*265/65R17	116	T	XL
18	*215/55R18	99	T	XL
	*225/45R18	95	T	XL
	*225/55R18	102	T	XL
	*225/60R18	104	T	XL
	*235/45R18	98	T	XL
	*235/50R18	101	T	XL

RIM	Size	Load	Speed	Load Type
18	*235/55R18	104	T	XL
	*235/60R18	107	T	XL
	*235/65R18	110	T	XL
	*245/45R18	100	T	XL
	*265/60R18	114	T	XL
19	*225/55R19	103	T	XL
	*235/45R19	99	T	XL
	*235/50R19	103	T	XL
	*235/55R19	105	T	XL
	*245/45R19	102	T	XL
	*255/45R19	104	T	XL
	*255/50R19	107	T	XL
	*255/55R19	111	T	XL
	*265/55R19	113	T	XL
20	*235/55R20	105	T	XL
	*245/45R20	103	T	XL
	*245/50R20	105	T	XL
	*255/45R20	105	T	XL
	*255/50R20	109	T	XL
	*255/55R20	110	T	XL
	*265/50R20	111	T	XL
	*265/55R20	113	T	XL
21	*235/50R21	104	T	XL
	*265/45R21	108	T	XL
22	*265/50R22	112	T	XL
	*275/50R22	115	T	XL

Notes: *under development



Excellent safety features

Good Snow Grip

NEW PRODUCT

BORIALIS SNOW


PASSENGER & SUV HIGH PERFORMANCE WINTER



TECHNICAL SPECIFICATIONS

64 ARTICLES
RIM SIZE: 14" - 22"
SECTION WIDTH: 175 - 285
ASPECT RATIO: 35 - 70
SPEED RATING: T – W


PRODUCT CHARACTERISTICS



◆ BORIALIS SNOW' s tread compound was developed specifically for extreme cold environments. It is designed from a combination of high-performance polymers, It remains soft in extremely cold conditions, resulting in better grip.



◆ Central circumferential block provides high-speed stability and improved handling performance.



◆ Zig-zag siping improves stiffness of shoulder blocks to prevent irregular wear and optimize steering responsiveness at the same time.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level
14	175/70R14	88	T	XL	C	D	71	2 {))}
15	*185/65R15	92	T	XL	-	-	-	-
	*195/65R15	95	T	XL	-	-	-	-
16	*195/55R16	91	H	XL	-	-	-	-
	205/55R16	94	H	XL	-	-	-	-
	*205/60R16	96	H	XL	-	-	-	-
	*215/65R16	102	T	XL	-	-	-	-
	265/70R16	112	T	-	C	D	73	2 {))}
17	215/55R17	94	H	-	C	D	72	2 {))}
	215/60R17	96	H	-	C	D	72	2 {))}
	*225/45R17	94	H	XL	-	-	-	-
	*225/50R17	98	H	XL	-	-	-	-
	*225/55R17	101	H	XL	-	-	-	-
	225/60R17	99	H	-	C	D	72	2 {))}
	225/65R17	102	H	-	C	D	72	2 {))}
	235/65R17	108	T	XL	C	D	72	2 {))}
	245/65R17	111	H	XL	C	D	72	2 {))}
	245/70R17	110	T	-	C	D	72	2 {))}
	265/65R17	116	H	XL	C	D	73	2 {))}
	265/70R17	116	T	XL	C	D	73	2 {))}
18	*215/55R18	99	H	XL	-	-	-	-
	*225/55R18	102	H	XL	-	-	-	-
	225/60R18	104	H	XL	C	D	72	2 {))}
	*235/45R18	98	H	XL	-	-	-	-
	*235/50R18	101	H	XL	-	-	-	-
	235/55R18	100	H	-	C	D	72	2 {))}
	235/60R18	107	T	XL	C	D	72	2 {))}
	*255/60R18	112	T	XL	-	-	-	-
	265/60R18	114	T	XL	C	D	73	2 {))}
	265/65R18	114	T	-	C	D	73	2 {))}
	*265/70R18	116	T	-	-	-	-	-

Notes: *under development

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level
19	225/55R19	99	H	-	C	D	72	2 {))}
	235/50R19	103	H	XL	C	D	72	2 {))}
	235/55R19	105	H	XL	C	D	72	2 {))}
	235/60R19	107	H	XL	C	D	72	2 {))}
	245/55R19	103	H	-	C	D	72	2 {))}
	*255/45R19	104	H	XL	-	-	-	-
	255/60R19	109	H	-	C	D	73	2 {))}
	265/55R19	109	H	-	C	D	73	2 {))}
20	235/50R20	100	H	-	C	D	72	2 {))}
	*245/40R20	99	H	XL	-	-	-	-
	245/45R20	103	H	XL	C	D	72	2 {))}
	245/50R20	105	H	XL	C	D	72	2 {))}
	255/40R20	101	H	XL	C	D	72	2 {))}
	255/45R20	105	H	XL	C	D	73	2 {))}
	255/50R20	109	H	XL	C	D	73	2 {))}
	255/55R20	110	H	XL	C	D	73	2 {))}
	*265/40R20	104	H	XL	-	-	-	-
	*265/50R20	111	H	XL	-	-	-	-
	*265/55R20	113	H	XL	-	-	-	-
	*275/35R20	102	H	XL	-	-	-	-
	275/45R20	110	W	XL	C	D	73	2 {))}
	275/50R20	113	H	XL	C	D	73	2 {))}
	*275/55R20	117	H	XL	-	-	-	-
	*285/35R20	104	H	XL	-	-	-	-
21	*235/50R21	101	H	-	-	-	-	-
	255/40R21	102	T	XL	C	D	73	2 {))}
	265/45R21	108	H	XL	C	D	73	2 {))}
	*275/45R21	110	H	XL	-	-	-	-
	*285/45R21	113	H	XL	-	-	-	-
22	265/40R22	106	H	XL	C	D	73	2 {))}
	*265/50R22	112	H	XL	-	-	-	-
	*275/50R22	115	H	XL	-	-	-	-
	*285/40R22	110	H	XL	-	-	-	-



Good Handling

Good Snow Grip

BORREAS WINTER PRO


NEW PRODUCT

PASSENGER & SUV HIGH PERFORMANCE WINTER




TECHNICAL SPECIFICATIONS


46 ARTICLES
RIM SIZE: 17" - 22"
SECTION WIDTH: 175 - 315
ASPECT RATIO: 50 - 70
SPEED RATING: H - W
ROLLING RESISTANCE: C
WET GRIP: B
NOISE LEVEL: B



PRODUCT CHARACTERISTICS



◆ Unique winter compound provides better elasticity and more ground contact area even at low temperature with exceptional grip on ice and snow, therefore improves braking performance.



◆ Double-sipe configuration enhances stiffness of blocks, bears high pressure of tire shoulder better and thus improves the steering response..



◆ V-Shaped grooves deliver great self-cleaning properties in mud and snow terrain, increase the tread-to-ground contact and further enhance the grip in winter.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level
17	205/60R17	97	H	XL	D	C	72	2 {))}
	215/55R17	98	V	XL	C	C	72	2 {))}
18	175/60R18	85	H	-	C	C	71	2 {))}
	195/60R18	96	H	XL	D	C	72	2 {))}
	*245/45R18	100	V	XL	-	-	-	-
	255/60R18	112	V	XL	C	C	73	2 {))}
	275/40R18	103	V	XL	D	C	73	2 {))}
19	225/40R19	93	V	XL	C	C	72	2 {))}
	*225/45R19	96	V	XL	-	-	-	-
	*225/55R19	103	V	XL	-	-	-	-
	*235/35R19	91	W	XL	-	-	-	-
	235/40R19	96	W	XL	C	C	72	2 {))}
	*235/45R19	99	V	XL	-	-	-	-
	*235/50R19	103	V	XL	-	-	-	-
	*235/55R19	105	V	XL	-	-	-	-
	245/35R19	93	W	XL	D	C	72	2 {))}
	*245/40R19	98	V	XL	-	-	-	-
	*245/45R19	102	V	XL	-	-	-	-
	*255/35R19	96	V	XL	-	-	-	-
	*255/40R19	100	V	XL	-	-	-	-
	*255/45R19	104	V	XL	-	-	-	-
	*255/50R19	107	V	XL	-	-	-	-
	*255/55R19	111	V	XL	-	-	-	-
	265/50R19	110	V	XL	C	C	73	2 {))}
	275/35R19	100	W	XL	D	C	73	2 {))}
	285/40R19	107	V	XL	C	C	75	2 {))}

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level
20	245/35R20	95	W	XL	D	C	72	2 {))}
	245/40R20	99	W	XL	C	C	72	2 {))}
	245/45R20	103	V	XL	C	C	72	2 {))}
	255/35R20	97	W	XL	D	C	73	2 {))}
	255/40R20	101	W	XL	C	C	73	2 {))}
	255/45R20	105	V	XL	C	C	73	2 {))}
	255/50R20	109	V	XL	C	C	73	2 {))}
	265/45R20	108	V	XL	C	C	73	2 {))}
	265/50R20	111	V	XL	C	C	73	2 {))}
	275/35R20	102	W	XL	D	C	73	2 {))}
	*275/40R20	106	V	XL	-	-	-	-
	*275/45R20	110	V	XL	-	-	-	-
	315/35R20	110	V	XL	C	C	75	2 {))}
21	275/40R21	107	V	XL	C	C	73	2 {))}
	275/45R21	110	V	XL	C	C	73	2 {))}
	285/40R21	109	V	XL	C	C	75	2 {))}
	285/45R21	113	V	XL	C	C	75	2 {))}
	315/35R21	111	V	XL	C	C	75	2 {))}
	315/40R21	115	V	XL	C	C	75	2 {))}
22	285/40R22	110	V	XL	C	C	75	2 {))}

Notes: *under development



MONTICE CSC-901

PASSENGER & SUV HIGH PERFORMANCE WINTER






TECHNICAL SPECIFICATIONS

89 ARTICLES
RIM SIZE: 14" - 21"
SECTION WIDTH: 155 - 295
ASPECT RATIO: 35 - 75

SPEED RATING: S - W
ROLLING RESISTANCE: D
WET GRIP: C/D
NOISE LEVEL: 69dB - 73dB



PRODUCT CHARACTERISTICS



◆ 3D sipes make the pattern blocks squirm with each other and provide interlocking function, taking into account the tread rigidity.



◆ Unique round hole design inspired from the bionic gecko's toe, increasing surface absorption capability between the tire and ice while providing excellent traction and braking on hard ice and snow road conditions.



◆ Ice-axe shaped pattern groove design provides excellent grip on snowy conditions.
◆ The zigzag patterns increase the friction between tires and snowy road and reduce the chance of the car slipping.
◆ Special silica compound & soft tread for excellent traction and braking performance on snowy surfaces.
◆ 3 wide grooves provide excellent water dispersion performance.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise (dB)	R117-Noise Level
14	155/65R14	75	T	-	D	D	71	2 {))}
	165/65R14	79	T	-	D	D	71	2 {))}
	165/70R14	85	T	XL	D	D	71	2 {))}
	175/65R14	86	T	XL	D	D	71	2 {))}
	175/70R14	88	T	XL	D	D	71	2 {))}
	185/55R14	80	H	-	D	D	71	2 {))}
	185/60R14	86	H	XL	D	D	71	2 {))}
	185/65R14	86	T	-	D	D	71	2 {))}
15	175/65R15	88	T	XL	D	D	71	2 {))}
	185/55R15	86	H	XL	D	D	71	2 {))}
	185/60R15	88	T	XL	D	D	71	2 {))}
	185/65R15	88	H	-	D	D	71	2 {))}
	195/50R15	82	H	-	D	D	72	2 {))}
	195/55R15	85	H	-	D	D	72	2 {))}
	195/60R15	88	H	-	D	D	72	2 {))}
	195/65R15	91	H	-	D	D	72	2 {))}
	205/65R15	94	T	-	D	D	72	2 {))}
	205/70R15	96	T	-	D	D	72	2 {))}
	215/65R15	100	H	XL	D	C	72	2 {))}
	215/75R15	100	S	-	D	C	72	2 {))}
16	175/60R16	82	H	-	D	D	71	2 {))}
	195/50R16	88	V	XL	D	D	72	2 {))}
	195/55R16	87	H	-	D	D	72	2 {))}
	195/60R16	89	H	-	D	D	72	2 {))}
	205/50R16	91	V	XL	D	D	72	2 {))}
	205/55R16	91	H	-	D	D	72	2 {))}
	205/55R16	94	H	XL	D	D	72	2 {))}
	205/60R16	92	H	-	D	D	72	2 {))}
	205/60R16	96	H	XL	D	D	72	2 {))}
	215/55R16	97	H	XL	D	C	72	2 {))}
	215/60R16	99	H	XL	D	C	72	2 {))}
	215/65R16	98	H	-	D	C	72	2 {))}
	215/70R16	100	T	-	D	C	72	2 {))}
	225/55R16	99	V	XL	D	C	72	2 {))}
	235/60R16	100	H	-	D	C	69	1 {}
	235/70R16	106	T	-	D	C	69	1 {}
	245/70R16	107	T	-	D	C	69	1 {}
	265/70R16	112	T	-	D	C	73	2 {))}
17	205/45R17	88	V	XL	D	D	72	2 {))}
	205/50R17	93	V	XL	D	D	72	2 {))}
	205/55R17	95	H	XL	D	D	72	2 {))}
	215/45R17	91	V	XL	D	C	72	2 {))}
	215/50R17	91	H	-	D	C	72	2 {))}
	215/60R17	96	H	-	D	C	72	2 {))}
	215/65R17	99	H	-	D	C	72	2 {))}
17	225/45R17	94	V	XL	D	C	72	2 {))}
	225/50R17	98	V	XL	D	C	72	2 {))}
	225/55R17	101	V	XL	D	C	72	2 {))}
	225/60R17	99	H	-	D	C	72	2 {))}
	225/65R17	102	H	-	D	C	72	2 {))}
	235/45R17	97	V	XL	D	C	69	1 {}
	235/55R17	103	V	XL	D	C	69	1 {}
	235/60R17	102	V	-	D	C	69	1 {}
	245/45R17	99	V	XL	D	C	72	2 {))}
	245/65R17	111	H	XL	D	C	69	1 {}
	265/65R17	116	H	XL	D	C	73	2 {))}
18	215/50R18	92	W	-	D	C	72	2 {))}
	215/55R18	95	H	-	D	C	72	2 {))}
	225/40R18	92	V	XL	D	C	72	2 {))}
	225/45R18	95	W	XL	D	C	72	2 {))}
	225/50R18	99	V	XL	D	C	72	2 {))}
	225/55R18	102	V	XL	D	C	72	2 {))}
	225/60R18	100	H	-	D	C	72	2 {))}
	235/40R18	95	V	XL	D	C	72	2 {))}
	235/45R18	98	V	XL	D	C	72	2 {))}
	235/60R18	107	V	XL	D	C	69	1 {}
	235/65R18	110	H	XL	D	C	69	1 {}
	245/40R18	97	V	XL	D	C	72	2 {))}
	245/45R18	100	V	XL	D	C	69	1 {}
	255/45R18	103	W	XL	D	C	73	2 {))}
	255/55R18	109	V	XL	D	C	73	2 {))}
	265/60R18	114	H	XL	D	C	73	2 {))}
19	225/35R19	88	W	XL	D	D	72	2 {))}
	225/45R19	96	V	XL	D	C	72	2 {))}
	225/55R19	103	V	XL	D	C	72	2 {))}
	235/35R19	91	W	XL	D	D	72	2 {))}
	235/45R19	99	V	XL	D	C	72	2 {))}
	235/50R19	103	V	XL	D	C	69	1 {}
	235/55R19	105	V	XL	D	C	69	1 {}
	245/40R19	98	W	XL	D	C	72	2 {))}
	245/45R19	102	W	XL	D	C	72	2 {))}
	255/35R19	96	V	XL	D	C	73	2 {))}
	255/40R19	100	W	XL	D	C	73	2 {))}
	255/45R19	104	V	XL	D	C	73	2 {))}
	255/50R19	107	V	XL	D	C	73	2 {))}
	255/55R19	111	V	XL	D	C	73	2 {))}
20	275/40R20	106	W	XL	D	C	73	2 {))}
	275/45R20	110	W	XL	D	C	73	2 {))}
21	295/35R21	107	V	XL	D	C	73	2 {))}

PASSENGER CAR/SUV ALL-SEASON

EVERCLIME CSC-401



ALL-SEASON



EVERCLIME CSC-401


PASSENGER AND SUV ALL-SEASON



TECHNICAL SPECIFICATIONS

69 ARTICLES
RIM SIZE: 13" - 21"
SECTION WIDTH: 155 - 295
ASPECT RATIO: 35 - 80

SPEED RATING: T - Y
ROLLING RESISTANCE: C/D
WET GRIP: B
NOISE LEVEL: 71dB - 75dB



PRODUCT CHARACTERISTICS


Unique tread compound provides reliable traction in all weather conditions.



◆ Massive lateral grooves combined with open shoulder disperse water quickly and prevent snow build-up.



◆ V-shaped pattern along with dense 3d sipes delivers improved handling and grip in turns.



◆ 3D siping cuts into water film deeply and enhances wet grip.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
13	155/70R13	75	T	-	D	B	71	2 {))}
	155/80R13	79	T	-	D	B	71	2 {))}
	175/70R13	82	T	-	D	B	71	2 {))}
14	155/65R14	75	T	-	D	B	71	2 {))}
	165/60R14	79	H	XL	C	B	71	2 {))}
	165/65R14	79	H	-	D	B	71	2 {))}
	165/70R14	81	T	-	D	B	71	2 {))}
	175/65R14	86	H	XL	C	B	71	2 {))}
	185/60R14	82	H	-	D	B	71	2 {))}
	185/65R14	86	H	-	D	B	71	2 {))}
15	165/65R15	81	H	-	D	B	71	2 {))}
	175/65R15	88	H	XL	C	B	71	2 {))}
	185/55R15	86	V	XL	C	B	72	2 {))}
	185/60R15	88	H	XL	C	B	71	2 {))}
	185/65R15	88	H	-	D	B	71	2 {))}
	195/50R15	86	W	XL	C	B	72	2 {))}
	195/55R15	89	V	XL	C	B	72	2 {))}
	195/60R15	88	H	-	D	B	72	2 {))}
	195/65R15	95	V	XL	C	B	72	2 {))}
16	175/60R16	82	H	-	D	B	71	2 {))}
	185/55R16	87	V	XL	C	B	71	2 {))}
	195/55R16	91	V	XL	C	B	72	2 {))}
	205/45R16	87	W	XL	C	B	72	2 {))}
	205/55R16	94	V	XL	C	B	72	2 {))}
	205/60R16	96	V	XL	C	B	72	2 {))}
	215/55R16	97	V	XL	C	B	72	2 {))}
	215/60R16	99	V	XL	C	B	72	2 {))}
	215/65R16	98	H	-	C	B	71	2 {))}
17	205/50R17	93	W	XL	C	B	72	2 {))}
	205/55R17	95	W	XL	C	B	72	2 {))}
	215/40R17	87	W	XL	C	B	72	2 {))}
	215/45R17	91	W	XL	C	B	72	2 {))}
	215/50R17	95	W	XL	C	B	72	2 {))}
	215/55R17	98	V	XL	C	B	72	2 {))}
	215/60R17	100	V	XL	C	B	72	2 {))}
	215/65R17	99	V	-	C	B	72	2 {))}
	225/45R17	94	V	XL	C	B	72	2 {))}
	225/50R17	98	W	XL	C	B	72	2 {))}
	225/55R17	101	W	XL	C	B	72	2 {))}
	225/60R17	99	V	-	C	B	72	2 {))}
	225/65R17	106	V	XL	C	B	72	2 {))}
	235/45R17	97	W	XL	C	B	72	2 {))}
	235/55R17	103	W	XL	C	B	72	2 {))}
	235/65R17	108	V	XL	C	B	72	2 {))}
	265/65R17	112	H	-	C	B	73	2 {))}
18	205/45R18	90	W	XL	C	B	72	2 {))}
	215/50R18	92	W	-	C	B	71	2 {))}
	215/55R18	99	W	XL	C	B	72	2 {))}
	225/40R18	92	W	XL	C	B	72	2 {))}
	225/40R18	92	Y	XL	C	B	72	2 {))}
	225/45R18	95	Y	XL	C	B	72	2 {))}
	225/50R18	95	W	-	C	B	72	2 {))}
	225/55R18	102	V	XL	C	B	72	2 {))}
	235/50R18	101	W	XL	C	B	72	2 {))}
	235/55R18	104	V	XL	C	B	72	2 {))}
	235/60R18	107	V	XL	C	B	72	2 {))}
	245/40R18	97	Y	XL	C	B	72	2 {))}
	245/45R18	100	Y	XL	C	B	72	2 {))}
	255/55R18	109	W	XL	C	B	73	2 {))}
	265/60R18	114	H	XL	C	B	73	2 {))}
19	225/35R19	88	Y	XL	C	B	72	2 {))}
	225/40R19	93	W	XL	C	B	72	2 {))}
	225/55R19	99	W	-	C	B	72	2 {))}
	235/35R19	91	Y	XL	C	B	72	2 {))}
	235/55R19	105	W	XL	C	B	72	2 {))}
	245/45R19	102	W	XL	C	B	72	2 {))}
	255/50R19	107	V	XL	C	B	73	2 {))}
20	195/55R20	95	H	XL	C	B	72	2 {))}
21	295/40R21	111	V	XL	C	B	75	2 {))}

SUV/4X4

XTOUR



SUV HP

SPORTCAT CSC-303




SUV UHP

SPORTCAT CSC-302



4X4 A/T

MASPIRE AT01



AT

MASPIRE M/T



4X4 M/T



Comfort


Good Handling

NEW PRODUCT

XTOUR

HIGH PERFORMANCE
TYRE FOR COMFORT SUV



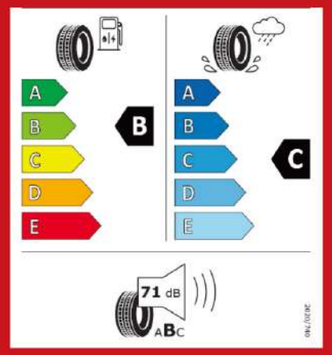

TECHNICAL SPECIFICATIONS

17 ARTICLES
RIM SIZE: 16" - 19"
SECTION WIDTH: 215 - 245
ASPECT RATIO: 55 - 70
SPEED RATING: T - V

ROLLING RESISTANCE: B
WET GRIP: C
NOISE LEVEL: 71DB - 72DB
VELVET SIDEWALL: LASER-CARVED MOLD

PRODUCT CHARACTERISTICS



◆ Unique pattern design with the new formula system provide stable driving experience.



◆ Multi-pitch design effectively reduces driving noise.



◆ Control noise effectively thanks to the semi-enclosed sound insulation wall design, and improve driving comfort.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level	Highlight
16	215/65R16	98	H	-	B	C	71	2 {))}	-
	215/70R16	100	T	-	B	C	71	2 {))}	-
17	215/60R17	96	H	-	B	C	71	2 {))}	-
	215/65R17	99	V	-	B	C	71	2 {))}	-
	225/60R17	99	V	-	B	C	71	2 {))}	-
	225/65R17	102	H	-	B	C	71	2 {))}	-
	235/55R17	99	H	-	B	C	71	2 {))}	-
	235/65R17	108	V	XL	B	C	72	2 {))}	-
18	215/55R18	99	V	XL	B	C	72	2 {))}	-
	225/55R18	98	V	-	B	C	71	2 {))}	-
	225/60R18	100	H	-	B	C	71	2 {))}	-
	235/55R18	104	V	XL	B	C	72	2 {))}	-
	235/60R18	107	V	XL	B	C	72	2 {))}	-
	235/65R18	110	H	XL	B	C	72	2 {))}	-
19	225/55R19	103	V	XL	B	C	72	2 {))}	Silenteck
	235/55R19	101	V	-	B	C	71	2 {))}	Silenteck
	245/55R19	103	V	-	B	C	70	2 {))}	Silenteck



SPORTCAT CSC-303


SUV ULTRA
HIGH PERFORMANCE TYRE




TECHNICAL SPECIFICATIONS

61 ARTICLES
RIM SIZE: 15" - 22"
SECTION WIDTH: 215 - 325
ASPECT RATIO: 30 - 70

SPEED RATING: T - Y
ROLLING RESISTANCE: C
WET GRIP: C
NOISE LEVEL: 71dB - 75dB



PRODUCT CHARACTERISTICS



- Unique pattern design ensures precise handling, thus providing excellent driving experience.
- Asymmetric pattern and big block on shoulder enhances cornering stability and responsiveness.



- Four main grooves with wide lateral sipes, offer excellent water dispersion performance.
- Multi-pitch design controls noise effectively and makes driving more comfortable.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
15	225/70R15	100	H	-	C	C	71	2 {))}
16	215/65R16	102	V	XL	C	C	72	2 {))}
	215/70R16	100	H	-	C	C	71	2 {))}
	225/70R16	103	T	-	C	C	71	2 {))}
	235/60R16	100	T	-	C	C	71	2 {))}
	235/70R16	106	H	-	C	C	71	2 {))}
	245/70R16	107	T	-	C	C	71	2 {))}
	255/70R16	111	T	-	C	C	72	2 {))}
17	215/60R17	96	H	-	C	C	71	2 {))}
	215/65R17	103	V	XL	C	C	72	2 {))}
	225/60R17	99	V	-	C	C	71	2 {))}
	225/65R17	102	T	-	C	C	71	2 {))}
	235/55R17	99	H	-	C	C	71	2 {))}
	235/60R17	102	V	-	C	C	71	2 {))}
	235/65R17	108	V	XL	C	C	72	2 {))}
	245/65R17	111	H	XL	C	C	72	2 {))}
	255/60R17	106	H	-	C	C	72	2 {))}
	255/65R17	110	H	-	C	C	72	2 {))}
	265/65R17	112	H	-	C	C	72	2 {))}
	265/70R17	115	T	-	C	C	72	2 {))}
	275/55R17	109	V	-	C	C	72	2 {))}
18	215/50R18	92	W	-	C	C	71	2 {))}
	215/55R18	99	V	XL	C	C	72	2 {))}
	225/50R18	99	W	XL	C	C	72	2 {))}
	225/55R18	98	W	-	C	C	71	2 {))}
	225/60R18	100	V	-	C	C	71	2 {))}
	235/50R18	101	W	XL	C	C	72	2 {))}
	235/55R18	104	V	XL	C	C	72	2 {))}
	235/60R18	107	V	XL	C	C	72	2 {))}
	235/65R18	110	H	XL	C	C	72	2 {))}
	245/60R18	109	V	XL	C	C	72	2 {))}
	255/55R18	109	V	XL	C	C	73	2 {))}
	255/60R18	112	V	XL	C	C	73	2 {))}
	265/60R18	110	H	-	C	C	72	2 {))}
19	225/55R19	103	W	XL	C	C	72	2 {))}
	235/50R19	103	W	XL	C	C	72	2 {))}
	235/55R19	105	W	XL	C	C	72	2 {))}
	245/45R19	102	Y	XL	C	C	72	2 {))}
	245/55R19	103	W	-	C	C	71	2 {))}
	255/50R19	107	V	XL	C	C	73	2 {))}
	255/55R19	111	V	XL	C	C	73	2 {))}
	265/50R19	110	Y	XL	C	C	73	2 {))}
	275/45R19	108	Y	XL	C	C	73	2 {))}
	285/45R19	111	V	XL	C	C	72	1 {}
20	245/45R20	103	W	XL	C	C	72	2 {))}
	245/50R20	102	W	-	C	C	71	2 {))}
	255/45R20	105	Y	XL	C	C	73	2 {))}
	255/50R20	109	Y	XL	C	C	73	2 {))}
	255/55R20	110	V	XL	C	C	72	2 {))}
	265/45R20	108	Y	XL	C	C	73	2 {))}
	275/40R20	106	V	XL	C	C	73	2 {))}
	315/35R20	110	Y	XL	C	C	75	2 {))}
21	255/40R21	102	Y	XL	C	C	73	2 {))}
	265/40R21	101	Y	-	C	C	72	2 {))}
	275/40R21	107	Y	XL	C	C	73	2 {))}
	275/45R21	110	Y	XL	C	C	73	2 {))}
	285/35R21	105	Y	XL	C	C	75	2 {))}
	285/40R21	109	Y	XL	C	C	75	2 {))}
	315/40R21	111	Y	-	C	C	74	2 {))}
	325/30R21	108	Y	XL	C	C	73	2 {))}
22	285/40R22	110	Y	XL	C	C	75	2 {))}



SPORTCAT CSC-302


4X4 A/T



TECHNICAL SPECIFICATIONS

38 ARTICLES
RIM SIZE: 15" - 20"
SECTION WIDTH: 205 - 275
ASPECT RATIO: 50 - 85


SPEED RATING: Q - V
ROLLING RESISTANCE: C/D
WET GRIP: B/C
NOISE LEVEL: 71dB - 73dB



PRODUCT CHARACTERISTICS



◆ Block pattern design brings excellent off road traction.



◆ 3D structure design of the shoulder provides stable and effective escape capability in all road conditions.



◆ Optimized tread depth combined with high wear resistant tread compound brings ultra high mileage.



◆ The overall pattern design keeps the driving safety under various conditions and increases tread life at the same time.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
15	205/60R15	91	H	-	D	C	71	2 {))}
	205/65R15	94	H	-	D	C	71	2 {))}
	205/70R15	96	H	-	D	C	71	2 {))}
	215/70R15	98	T	-	D	C	71	2 {))}
	215/75R15	100	T	-	D	C	71	2 {))}
	235/75R15	109	S	-	D	C	72	2 {))}
	255/70R15	108	T	XL	D	C	72	2 {))}
	P225/75R15	102	T	-	D	C	71	2 {))}
16	205/60R16	92	H	-	D	C	71	2 {))}
	205R16C	110/108	S	8PR	C	B	73	2 {))}
	215/70R16	100	H	-	D	C	71	2 {))}
	225/70R16	103	T	-	D	C	71	2 {))}
	225/75R16	108	T	XL	D	C	72	2 {))}
	225/75R16LT	115/112	Q	10PR	C	B	73	2 {))}
	235/70R16	106	T	-	D	C	71	2 {))}
	235/85R16LT	120/116	S	10PR	C	B	73	2 {))}
	245/70R16	111	S	XL	D	C	72	2 {))}
	245/75R16	111	T	-	D	C	71	2 {))}
	245/75R16LT	120/116	Q	10PR	C	B	73	2 {))}
	265/70R16	112	T	-	D	C	72	2 {))}
	265/75R16	116	S	-	D	C	72	2 {))}
	275/70R16	114	T	-	D	C	72	2 {))}
17	225/60R17	99	H	-	D	C	71	2 {))}
	225/65R17	102	H	-	D	C	71	2 {))}
	235/60R17	102	T	-	D	C	71	2 {))}
	235/65R17	108	T	XL	D	C	72	2 {))}
	245/65R17	107	T	-	D	C	71	2 {))}
	245/70R17LT	114/110	Q	8PR	-	-	-	-
	245/70R17LT	119/116	S	10PR	C	B	73	2 {))}
	265/60R17	108	S	-	-	-	-	-
	265/65R17	112	T	-	D	C	72	2 {))}
	265/70R17	115	T	-	D	C	72	2 {))}
	265/70R17LT	121/118	Q	10PR	C	B	73	2 {))}
	275/65R17	115	T	-	D	C	72	2 {))}
18	265/60R18	110	T	-	D	C	72	2 {))}
	265/65R18	114	T	-	-	-	-	-
19	255/55R19	111	V	XL	D	C	73	2 {))}
20	265/50R20	111	S	XL	D	C	73	2 {))}



High Trafficability
Robustness
Good Grip

NEW PRODUCT

MASPIRE AT01


4X4 A/T




TECHNICAL SPECIFICATIONS

23 ARTICLES
RIM SIZE: 15" - 20"
SECTION WIDTH: 235 - 285
ASPECT RATIO: 50 - 70
SPEED RATING: Q-T

PRODUCT CHARACTERISTICS




◆ The zigzag vertical channel design is conducive to the efficient discharge of sand and improve the traction performance of off-road. The integrated pattern design ensures the overall rigidity of the pattern block.



◆ The large pattern design helps to improve the handling performance of the tire. The irregular pattern blocks enhance the beauty of the design and make the pattern more robust and open.



◆ The design of stone ejector is added to the bottom of the pattern trench, which is conducive to automatic cleaning of stones.



◆ The tread uses a new wear-resistant compound, which effectively resists the impact of the rough road surface and improves the tear resistance of the tire pattern.

RIM	Size	Load	Speed	Load Type	Highlight
15	*31X10.50R15LT	109	S	6PR	RWL
16	*235/70R16	106	T	-	RWL
	*245/70R16	111	S	XL	RWL
	*265/70R16	112	T	-	RWL
17	*235/65R17	108	T	XL	RWL
	*245/65R17	107	T	-	RWL
	*245/70R17	110	T	-	RWL
	*LT245/70R17	119/116	Q	10PR	RWL
	*265/65R17	112	T	-	RWL
	*265/70R17	115	T	-	RWL
	*LT265/70R17	121/118	Q	10PR	RWL
	LT285/70R17	126/123	Q	10PR	RWL
18	*245/60R18	109	T	XL	-
	*265/60R18	110	T	-	-
	*265/65R18	116	T	XL	RWL
	*265/70R18	116	T	-	-
	*285/60R18	120	T	XL	RWL
19	*265/55R19	113	T	XL	-
20	*255/50R20	109	T	XL	-
	*265/50R20	111	S	XL	-
	*275/50R20	113	T	XL	-
	*275/60R20	119	T	XL	-
	*285/50R20	116	T	XL	-

Notes: *under development



High Trafficability
Robustness
Good Grip

MASPIRE M/T

4X4 M/T



TECHNICAL SPECIFICATIONS


17 ARTICLES
RIM SIZE: 15" - 20"
SECTION WIDTH: 225 - 285
ASPECT RATIO: 65 - 85

SPEED RATING: Q
ROLLING RESISTANCE: POR
WET GRIP: POR
NOISE LEVEL: POR


PRODUCT CHARACTERISTICS



◆The reinforced shoulder pattern block and 3D sidewall design can adapt various road conditions and effectively protect the sidewall.



◆Simulation of sharp tooth pattern block and zigzag groove design provides excellent grip and traction ability even on bad roads.



◆Excellent stone and mud discharge ability greatly improves the tire life.

RIM	Size	Load	Speed	Load Type	Highlight
15	30X9.50R15LT	104	Q	6PR	OWL
	31X10.50R15LT	109	Q	6PR	OWL
	LT235/75R15	104/101	Q	6PR	OWL
16	LT225/75R16	115/112	Q	10PR	-
	LT235/85R16	120/116	Q	10PR	-
	LT245/70R16	118/115	Q	10PR	-
	LT245/75R16	120/116	Q	10PR	-
	LT265/70R16	121/118	Q	10PR	-
	LT265/75R16	123/120	Q	10PR	OWL
	LT285/75R16	126/123	Q	10PR	-
17	33X12.50R17LT	120	Q	10PR	-
	LT265/65R17	120/117	Q	10PR	-
	LT265/70R17	121/118	Q	10PR	-
	LT285/70R17	121/118	Q	10PR	-
18	33X12.50R18LT	118	Q	10PR	-
20	33X12.50R20LT	114	Q	10PR	-
	35X12.50R20LT	121	Q	10PR	-

VAN SUMMER

CSR-71



VAN SUMMER

CLEVANTO CSC-102



VAN SUMMER

CLEVANTO CSC-101



VAN SUMMER



CSR71


VAN SUMMER - COMMERCIAL LT / VAN / PICK-UP



TECHNICAL SPECIFICATIONS

54 ARTICLES
RIM SIZE: 13" - 17"
SECTION WIDTH: 165 - 235
ASPECT RATIO: 55 - 85

SPEED RATING: N - H
ROLLING RESISTANCE: C
WET GRIP: A
NOISE LEVEL: 71dB - 72dB



PRODUCT CHARACTERISTICS

- Reasonable pattern design combined with unique formula provide excellent wet grip and improve the tread life & mileage at the same time.
- The high strength skeleton material enhances the overall rigidity of the tire to meet the load bearing requirements.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
13	165/70R13C	88/86	T	6PR	C	A	72	2 {))}
	165R13C	94/93	Q	8PR	C	A	72	2 {))}
	175R13C	97/95	Q	8PR	C	A	72	2 {))}
14	165/70R14C	89/87	R	6PR	C	A	72	2 {))}
	175/65R14C	90/88	T	6PR	C	A	72	2 {))}
	175/70R14C	95/93	T	6PR	C	A	72	2 {))}
	175/70R14C	99/95	Q	8PR	C	A	72	2 {))}
	175/70R14LT	87/84	S	6PR	-	-	-	-
	175/70R14LT	95/93	S	8PR	C	A	72	2 {))}
	175R14C	99/98	Q	8PR	C	A	72	2 {))}
	175R14LT	99/97	Q	8PR	C	A	72	2 {))}
15	185/80R15LT	94/91	R	6PR	-	-	-	-
	185R15C	103/102	R	8PR	C	A	72	2 {))}
	185R15LT	98/97	Q	6PR	C	A	72	2 {))}
	185R15LT	103/102	R	8PR	C	A	72	2 {))}
	195/70R15C	104/102	N	8PR	C	A	72	2 {))}
	195/70R15C	104/102	R	8PR	C	A	72	2 {))}
	195/70R15LT	99/96	T	8PR	C	A	72	2 {))}
	195/70R15LT	104/101	R	10PR	C	A	72	2 {))}
	195/70R15LT	109/105	R	12PR	C	A	72	2 {))}
	205/65R15C	102/100	T	6PR	C	A	72	2 {))}
	205/70R15C	106/104	R	8PR	C	A	72	2 {))}
	215/65R15C	104/102	T	6PR	C	A	72	2 {))}
	215/70R15C	109/107	S	8PR	C	A	72	2 {))}
	215/70R15C	109/107	R	8PR	C	A	72	2 {))}
	225/70R15C	112/110	R	8PR	C	A	72	2 {))}
16	175/75R16C	101/99	Q	8PR	C	A	72	2 {))}
	175/75R16LT	91/88	Q	6PR	-	-	-	-
	175/75R16LT	97/94	Q	8PR	-	-	-	-
	185/75R16C	104/102	R	8PR	C	A	72	2 {))}
	195/60R16C	99/97	T	6PR	C	A	72	2 {))}
	195/65R16C	104/102(100)	R(T)	8PR	C	A	72	2 {))}
	195/65R16LT	103/100	R	10PR	-	-	-	-
	195/75R16C	107/105	R	8PR	C	A	72	2 {))}
	195/75R16LT	112/109	R	12PR	C	A	72	2 {))}
	195/85R16C	114/112	L	12PR	-	-	-	-
	195/85R16LT	104/101	S	8PR	-	-	-	-
	205/65R16C	107/105(103)	T	8PR	C	A	72	2 {))}
	205/75R16C	110/108	Q	8PR	C	A	72	2 {))}
	205/75R16C	110/108	R	8PR	C	A	72	2 {))}
	205R16C	110/108	S	8PR	C	A	72	2 {))}
	215/60R16C	103/101	T	6PR	C	A	72	2 {))}
	215/65R16C	109/107(106)	R(T)	8PR	C	A	72	2 {))}
	215/75R16C	113/111	Q	8PR	C	A	72	2 {))}
	215/75R16C	116/114	R	10PR	C	A	72	2 {))}
	215/75R16C	116/114	S	10PR	C	A	72	2 {))}
	215/75R16LT	112/109	Q	10PR	-	-	-	-
	225/65R16C	112/110	R	8PR	C	A	71	2 {))}
	225/75R16C	119/116	R	12PR	-	-	-	-
	225/75R16C	121/120	R	10PR	C	A	72	2 {))}
	*225/75R16LT	119/116	R	12PR	-	-	-	-
	235/65R16C	115/113	R	8PR	C	A	72	2 {))}
17	215/60R17C	109/107	T	8PR	C	A	72	2 {))}
	225/55R17C	109/107	H	10PR	C	A	72	2 {))}

Notes: *under development



CLEVANTO CSC-101

VAN SUMMER -
COMMERCIAL LT / VAN / PICK-UP



TECHNICAL SPECIFICATIONS

4 ARTICLES
RIM SIZE: 12" - 15"
SECTION WIDTH: 155 - 195
ASPECT RATIO: 80

SPEED RATING: Q - R
ROLLING RESISTANCE: D
WET GRIP: B
NOISE LEVEL: 72dB

PRODUCT CHARACTERISTICS

- Outstanding durability and load performance is due to excellent profile design and enhanced shoulder strength.
- Reasonable pattern layout can effectively reduce abnormal wear and improve the mileage.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
12	155R12C	88/86	Q	8PR	-	-	-	-
14	185R14LT	97/95	Q	6PR	D	B	72	2 {))}
	185R14LT	102/100	R	8PR	D	B	72	2 {))}
15	*195R15LT	101/99	Q	6PR	-	-	-	-

Notes: *under development



CLEVANTO CSC-102


VAN SUMMER -
COMMERCIAL LT / VAN / PICK-UP



TECHNICAL SPECIFICATIONS

25 ARTICLES
RIM SIZE: 13" - 16"
SECTION WIDTH: 165 - 255
ASPECT RATIO: 65 - 85

SPEED RATING: N - T
ROLLING RESISTANCE: C
WET GRIP: B
NOISE LEVEL: 72dB



PRODUCT CHARACTERISTICS

- Mature pattern and formula design, improves tread life and mileage.
- With greatly improved grip, driving becomes safer.
- Strengthened skeleton material enhances the overall rigidity of the tire to meet the loading capacity requirements.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level	Highlight
13	165R13C	94/93	Q	8PR	D	C	72	2 {B}	-
14	165R14LT	96/95	R	8PR	C	B	72	2 {B}	-
	*175/75R14LT	88/85	R	6PR	C	B	72	2 {B}	-
	175/75R14LT	94/91	R	8PR	C	B	72	2 {B}	-
	175/75R14LT	99/96	S	10PR	C	B	72	2 {B}	-
	175R14LT	94/92	Q	6PR	-	-	-	-	-
	175R14LT	99/97	Q	8PR	C	B	72	2 {B}	-
	185R14LT	102/100	R	8PR	D	B	72	2 {B}	-
	185R14C	102/100	R	8PR	C	B	72	2 {B}	-
	195R14C	106/104	R	8PR	C	B	72	2 {B}	-
15	195/70R15C	104/102	R	8PR	C	C	72	2 {B}	-
	*195R15C	106/104	R	8PR	-	-	-	-	WR
	195R15C	106/104	R	8PR	C	B	72	2 {B}	-
	205/70R15C	106/104	R	10PR	C	B	72	2 {B}	-
	215/70R15C	109/107	R	10PR	C	B	72	2 {B}	-
	225/75R15C	116/114	Q	8PR	C	B	72	2 {B}	-
	225/70R15C	112/110	R	8PR	C	C	72	2 {B}	-
	235/75R15LT	104/101	Q	6PR	C	C	72	2 {B}	-
	255/70R15C	112/110	R	8PR	C	C	72	2 {B}	-
16	195/75R16C	107/105	R	8PR	C	C	72	2 {B}	-
	205/85R16C	117/115	N	12PR	C	C	72	2 {B}	-
	205R16C	110/108	S	8PR	C	C	72	2 {B}	-
	215/70R16C	108/106	T	8PR	-	-	-	-	-
	215/65R16C	109/107	R	8PR	C	C	72	2 {B}	-
	235/65R16C	115/113	R	8PR	C	C	72	2 {B}	-

Notes: *under development

VAN WINTER

MONTICE CSC-902



VAN WINTER



MONTICE CSC-902

VAN WINTER



TECHNICAL SPECIFICATIONS

33 ARTICLES
RIM SIZE: 12" - 17"
SECTION WIDTH: 145 - 235
ASPECT RATIO: 55 - 80

SPEED RATING: N - H
ROLLING RESISTANCE: D
WET GRIP: C/D
NOISE LEVEL: 69dB - 73dB

PRODUCT CHARACTERISTICS



◆ 3D sipes make the pattern blocks squirm with each other and provide interlocking function, taking into account the tread rigidity.



◆ Continuous pattern block design prevents slipping on the snowy road and offers excellent handling response.



◆ The serrated continuous block design increases the friction between the snowy road and tires, improving the performance on a snowy road.

◆ Special silica compound and the soft tread provides excellent performance in low temperature conditions.

◆ Three wide grooves for excellent water dispersion performance.

◆ Variant sipes suit for more road conditions.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
12	155R12C	88/86	Q	8PR	D	C	73	2 {))}
13	145/80R13	75	T	-	D	D	71	2 {))}
	155/65R13	73	T	-	D	D	71	2 {))}
	155/70R13	75	T	-	D	D	71	2 {))}
	155/80R13	79	T	-	D	D	71	2 {))}
	155R13C	90/88	Q	8PR	D	C	73	2 {))}
	165/70R13	79	T	-	D	D	71	2 {))}
	165R13C	94/93	Q	8PR	D	C	73	2 {))}
	175/70R13	86	T	XL	D	D	69	2 {))}
14	175/70R14C	95/93	Q	6PR	D	C	73	2 {))}
	175/75R14C	99/98	S	8PR	D	C	73	2 {))}
	175R14C	99/98	Q	8PR	D	C	73	2 {))}
	185R14C	102/100	Q	8PR	D	C	73	2 {))}
	195R14C	106/104	Q	8PR	D	C	73	2 {))}
15	185R15C	103/102	R	8PR	-	-	-	-
	195/70R15C	104/102	Q	8PR	D	C	73	2 {))}
	195R15C	106/104	Q	8PR	-	-	-	-
	215/65R15C	104/102	T	6PR	D	C	73	2 {))}
	215/70R15C	109/107	R	8PR	D	C	73	2 {))}
	225/70R15C	112/110	Q	8PR	D	C	70	1 {}
16	185/75R16C	104/102	R	8PR	D	C	73	2 {))}
	195/60R16C	99/97	T	6PR	D	C	73	2 {))}
	195/65R16C	104/102(100)	T	8PR	D	C	73	2 {))}
	195/75R16C	107/105	R	8PR	D	C	73	2 {))}
	205/65R16C	107/105(103)	T	8PR	D	C	73	2 {))}
	205/75R16C	110/108	Q	8PR	D	C	73	2 {))}
	215/65R16C	109/107(106)	R(T)	8PR	D	C	73	2 {))}
	215/75R16C	116/114	N	10PR	D	C	73	2 {))}
	225/65R16C	112/110	R	8PR	D	C	70	1 {}
	225/75R16C	121/120	R	10PR	D	C	70	1 {}
	235/65R16C	115/113	R	8PR	D	C	70	1 {}
17	215/60R17C	109/107	T	8PR	D	C	73	2 {))}
	225/55R17C	109/107	H	10PR	D	C	73	2 {))}

VAN ALL-SEASON

ENDURA 4S

NEW PRODUCT



VAN ALL-SEASON



Good Wet Grip

Good Handling

High Load

NEW PRODUCT


ENDURA 4S

VAN ALL SEASON




TECHNICAL SPECIFICATIONS


13 ARTICLES
RIM SIZE: 15”- 16”
SECTION WIDTH: 195 - 235
ASPECT RATIO: 60 - 75
SPEED RATING: R- H
ROLLING RESISTANCE: C
WET GRIP: A
NOISE LEVEL: 72dB




PRODUCT CHARACTERISTICS



◆3D Block tread design combined with reinforced profile structure ensures the driving safety; Meanwhile enhances the loading capacity and tire life.



◆ Ensures the equal distribution of contact force and enhances the dry grip with stabilized steering capability at the same time.



◆Makes tread rubber closely stick to the road even in low temperature thanks to advanced wear-resistant low TG polymer and softener. Plus, the special compound with nanoscale silica provides tires with low rolling resistance and superior wet performances.

RIM	Size	Load	Speed	Load Type	R117-Rolling Resistance	R117-Wet Grip	R117-Noise(dB)	R117-Noise Level
15	195/70R15C	104/102	T	8PR	C	A	72	2 ())
	215/70R15C	109/107	S	8PR	C	A	72	2 ())
16	195/60R16C	99/97	H	6PR	C	A	72	2 ())
	195/65R16C	104/102	T	8PR	C	A	72	2 ())
	195/75R16C	110/108	R	10PR	C	A	72	2 ())
	205/65R16C	107/105	T	8PR	C	A	72	2 ())
	205/75R16C	113/111	R	10PR	C	A	72	2 ())
	215/60R16C	103/101	T	6PR	C	A	72	2 ())
	215/65R16C	109/107	T	8PR	C	A	72	2 ())
	215/75R16C	116/114	R	10PR	C	A	72	2 ())
	225/65R16C	112/110	R	8PR	C	A	72	2 ())
	225/75R16C	121/120	R	10PR	C	A	72	2 ())
	235/65R16C	121/119	R	10PR	C	A	72	2 ())